

## Multimode Single Fiber Optical Extenders

### HDMI 2.0 Full 4K (18G) Fiber Optical Extender with Gigabit Ethernet



**HDMI20-OPTC-TX220-PRO**



The HDMI20-OPTC-TX/RX220-PRO is a HDMI 2.0 compatible extender pair for video, RS-232 and Gigabit Ethernet signals, supporting uncompressed 4K UHD resolution at 60Hz 4:4:4. This extender pair is particularly recommended for rental and staging applications, 4K live events, and for future-proof operation centers. The extender can transmit HDMI 2.0 signals with 18Gbps over one multimode fiber to a distance up to 700 meters.

Using the factory, custom or transparent EDID emulation the user can fix and lock EDID data on the HDMI connector. Advanced EDID Management forces the required resolution from any video source and fixes the output format conforming to the system requirements. The unit offers bi-directional and transparent RS-232 transmission and Gigabit Ethernet over the fiber connection.

All devices can be mounted on a rack shelf or used standalone, rack ears also serve easy handling and bump protection, mounting threads on top and one of the sides to conform strict installation safety regulations.

The device features Pixel Accurate Reclocking, a Lightware technology to eliminate jitter and skew generated by low quality sources and multiple daisy-chained devices.

Single fiber technology makes these units fully HDMI 2.0 compliant without need of a second fiber cable or copper connections.

Galvanic isolation between source and display helps avoiding ground loops and hum effects. No delay occurs in the signal during optical conversion, the video image is transported without frame latency. This feature is crucial in 3D applications and systems where audio is processed separately.

Lightware's HDMI20-OPTC series supports both HDR10 and Dolby Vision in the HDMI signal at 10 or 12 bit speeds respectively, within its frame bandwidth of 18 Gbps maximum.

#### Applications

- Rental and staging
- Long distance lossless HDMI or DVI signal transmission
- Professional AV systems, conference rooms

#### Features

- Resolutions up to 4K@60Hz with RGB 4:4:4 colorspace
- 18 Gbps bandwidth
- HDMI 2.0, HDMI 1.x and DVI 1.0 compliant
- Splitting of 4K UHD at 60Hz to two output ports with left half and right half of the original video
- HDR and Dolby Vision support
- 36-bit deep color support
- 3D signal compatibility with frame packing, side-by-side and top-bottom formats
- 2x HDMI inputs for main/backup sources with autoswitch
- Supports all HDMI audio formats: Dolby TrueHD and DTS-HD Master Audio
- 2x Gigabit Ethernet (control for both outputs)
- Ethernet and USB control options
- Pixel Accurate Reclocking on each input
- Advanced EDID Management
- Color graphic LCD and jog dial push button for front panel control on TX side
- Lightware Device Controller software control over Ethernet and USB
- Third party control with LW3 protocol over Ethernet or RS-232
- Firmware upgrade with Lightware Device Updater software over Ethernet
- Neutrik OpticalCON fiber connectors
- Breakout LC connector for Neutrik OpticalCON Duo
- Local monitor output on TX side
- Built-in universal power supply
- Mounting thread on top and one of the sides and fixed mounting ears for safe and secure installation
- Handles for rigging and safety wire rope





HDMI20-OPTC-TX220-PRO



HDMI20-OPTC-RX220-PRO

This extender is also available with **Neutrik Quad**, **Neutrik Powercon True1** and **FiberFox** optical connectors

TX220-PRO



TX220-NTQ




TX220-FOX



TX220-PCN



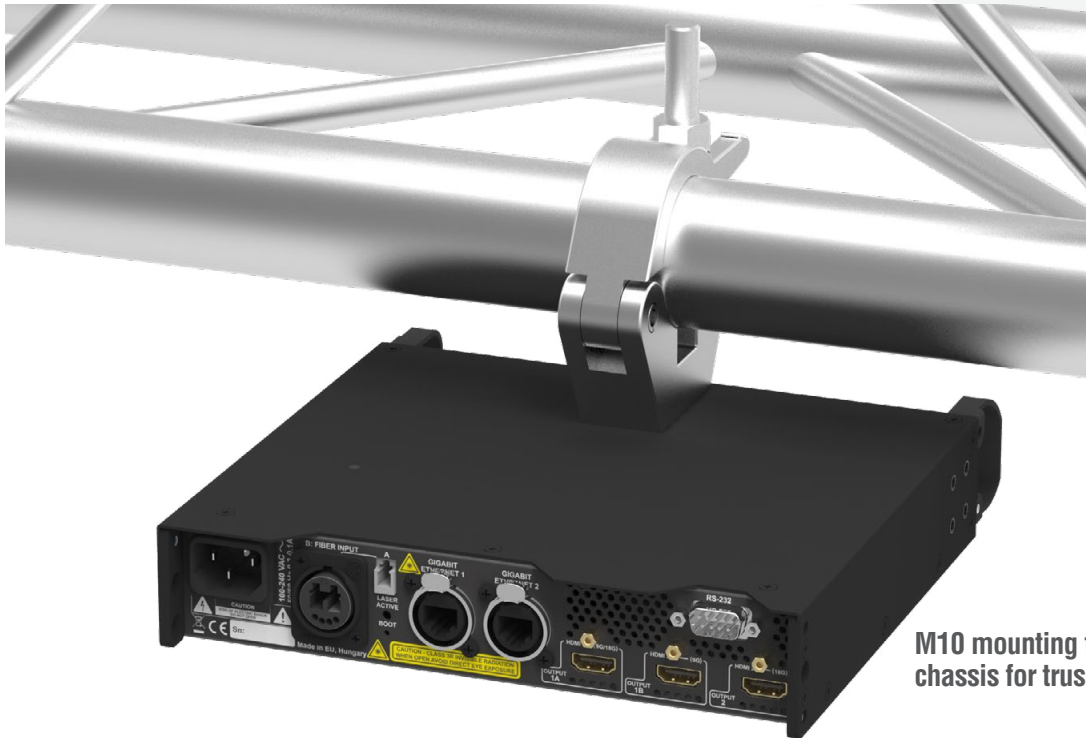

M10 mounting threads on the chassis for truss clamps

## Video functionality

- TX input1 + input2 shall work as main/backup video input (autoswitch)
- TX outputs shall be able to convert 4:4:4 <-> 4:2:0 (long-reach mode)
- RX output1+output2a shall work as mirrored HDMI2.0 (2x 6G out) (output2b disabled)
- RX output2a+output2b shall work as 2x3G left/right mode (1x 6G + 2x 3G out)
- RX outputs shall be able to convert 4:4:4 <-> 4:2:0 (long-reach mode)

## Audio functionality

- Only embedded audio support (for all HDMI audio formats are supported including HBR Audio)
- No analog audio embedding and de-embedding
- No ARC support

## Powering

- Internal AC/DC power supply
- No remote powering

## Control signals over OPTC

- Ethernet 1G pass-through
- RS-232 command injection & pass-through
- No IR command injection & pass-through
- No CEC command injection & pass-through

## Configuration and control

- LDC software control over Ethernet, optional: USB or RS-232
- Third party control with LW3 protocol over Ethernet or RS-232
- Firmware upgrade with LDU over Ethernet (no USB)
- Event Manager standard features

## EDID Management

- Advanced EDID Management
- Full factory EDID list
- Read EDID from connected receivers
- Switch emulated EDID via LW3 protocol (LDC or third party controller)

## Enclosure

- 1RU high box
- Max 1/2 rack width
- Silent operation
- Compatible with applicable Lightware mounting accessories (rack shelf, rack ear, mounting bracket v2)

## Front panel control and LED feedback

- TX: LCD menu for EDID setup and status check.
- TX status LEDs:
  - POWER/LIVE
  - FIBER LINK
  - HDCP
  - INPUT 1
  - INPUT 2
- RX: only status LEDs
  - POWER/LIVE
  - FIBER LINK
  - HDCP
  - SIGNAL PRESENT
  - OUTPUT CONVERSATION

## Connectors on TX and RX

Device	Optical Connectors	Power Inlet	Ethernet	HDMI Ports	USB
HDMI20-OPTC-TX/RX220-Pro	1x Neutrik OpticalCON DUO	IEC 60320-C14	2x EtherCON for Gigabit Ethernet (control & pass-through)	TX: 2x HDMI 2.0 input (18G) and 1x HDMI 2.0 output (18G) RX: 2x HDMI 2.0 output (18G) and 1x HDMI 2.0 output (9G)	Mini USB B
HDMI20-OPTC-TX/RX220-NTQ	1x Neutrik OpticalCON Quad				
HDMI20-OPTC-TX/RX220-FOX	1x Fiberfox				
HDMI20-OPTC-TX/RX220-PCN	1x Neutrik OpticalCON DUO	Neutrik Powercon True1			

## Specifications


Max Video Data rate:	18 Gbps
Max Resolution:	Up to 4K UHD 3840x2160@60Hz
Video delay:	0 frames
HDR Modes:	HDR and Dolby Vision
EDID emulation:	Advanced EDID Management
EDID memory:	Factory preset and User programmable
EDID support:	256 byte Extended EDID
Front panel control:	Jog Dial and select button on TX Select button on TX Function button on RX
RS-232 pass through:	Bi-directional 9.6, 14.4, 19.2, 38.4, 57.6 kBauds
Fiber:	Neutrik opticalCON LC duplex, LC simplex for channel breakout
Laser wavelengths:	6 channel CWDM
High speed lanes:	778; 801; 824; 850 nm
Low speed lanes:	911; 980 nm
Laser class specification:	Class 3R
Power supply:	Internal AC/DC power supply
Enclosure:	bottom and back 1 mm metal, top and front 1,5 mm metal
Dimensions:	1RU height x ½ rack width
Compliance:	CE
Warranty:	3 years

## Maximum Extension Distances


	Pixel Clock	OM1	OM2	OM3	OM4
1280x720p60	74 Mhz	800 m	1000 m	2500 m	2500 m
1920x1080p60	148.5 MHz	500 m	1000 m	2500 m	2500 m
3840x2160p30 (4k30 4:4:4)	297 MHz	200 m	600 m	1500 m	1500 m
3840x2160p60 (4k60 4:2:0)					
3840x2160p60 (4k60 4:4:4)	594 MHz	Not supported	300 m	700 m	700 m
4096x2160p60 (DCI 4K60)					


## Port Diagram

HDMI20-OPTC-TX220-Pro

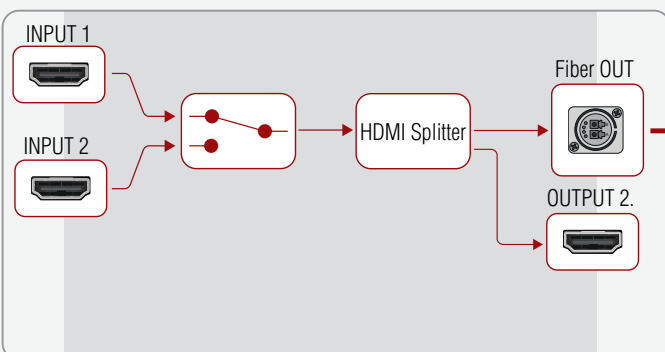

HDMI20-OPTC-RX220-Pro

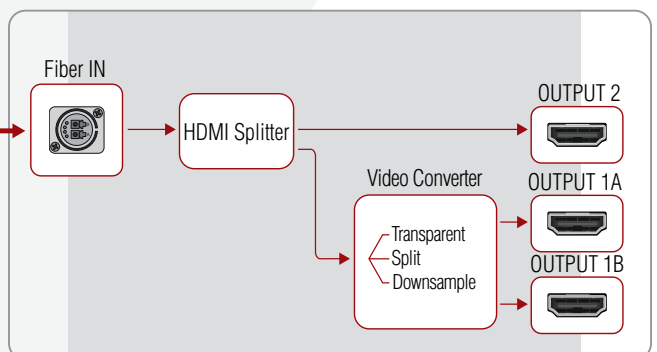

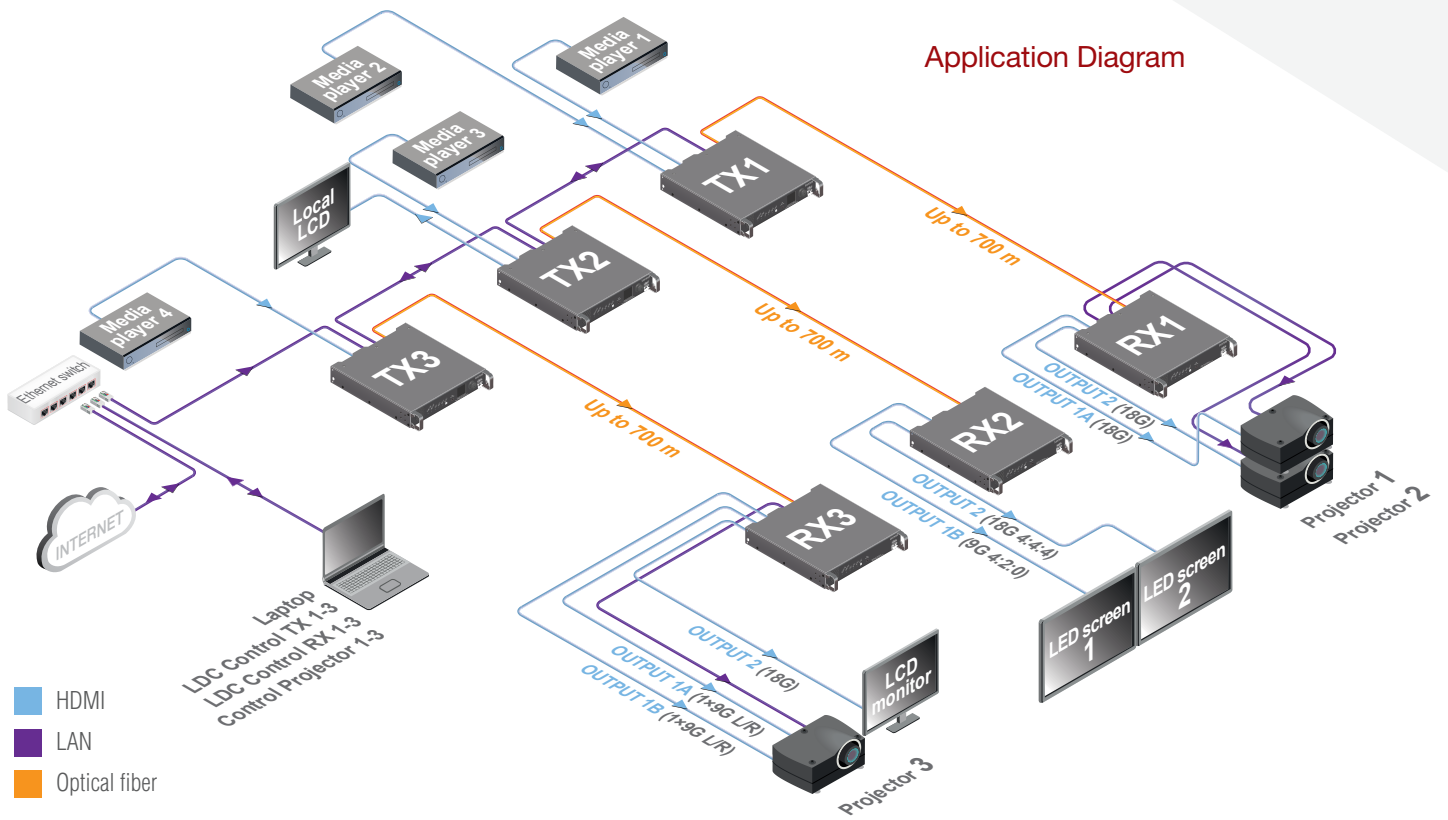

### Mounting as a Standard Rack Installation (HDMI20-OPTC-TX220-Pro)

### Truss Mounting (HDMI20-OPTC-RX220-Pro)

