

# **DVS 4U SWARM4-10G-A4000 Pro**



#### Overview

DVS SWARM Media Servers are multi-laned, multi-channel, high performance systems designed to handle extreme bandwidth data rates, high thread count and high-quality media playback across multiple outputs.

The 4U SWARM4-10G-A4000 Pro is a high performance four output media server, utilising the nVidia RTX A4000 with 16GB of graphics memory. Making this server ideal for multi-channel media server applications. This server utilises workstation grade hardware to deliver outstanding performance, whether using your own custom application / content, or running a third-party render engine this server has plenty of overhead. The professional level graphics card gives great performance as well as additional features such as EDID emulation, supplying an extra level of reliability and in the Pro+ version ( sync module ) the server can frame lock between multiple units, or Genlock to an external source.

Each output on the server can run up to 8k@60Hz RGB, although the framerate of the final output is software / content dependant.



### **Specifications**

- DVS 4U Rackmount Chassis 465.2 x 430.0 x 176.0mm (D x W x H)
- 1200 Watt PSU: 100 240V<sup>-</sup>, 15 7.5A, 47 63Hz
- E-ATX Motherboard ( AMD WRX80 Chipset )
- AMD Threadripper PRO Processor (16, 32 or 64 cores with Hyper Threading)
- 64 / 128 / 256 GB DDR4 Octa Channel ECC Memory
- nVidia A4000 Graphics Card (Up to 4 concurrent displays)
- 3 x NVMe M.2 Storage
- 2 x 10 Gigabit Network Ports
- Intel WiFi 6
- Sync Module
- Operating System Windows Enterprise IoT LTSC 2019 or Windows 10 Pro
- Optional Extras ( Variants )
  - Up to 8 x NVMe Storage via RAID Controller Card (RAID 0, 1, and 10)
  - o 2 x 4K@60 Capture Card
  - o 4 x HD@60 Capture Card
  - 40Gb Network (SFP+)

#### **Variations**

Model Number	NVMe RAID	2 x 4K	4 x HD	40Gb Network	Sync Module
4U SWARM4-10G-A4000 Pro	KAID	Capture	Capture	Network	Module
4U SWARM4-10G-A4000 Pro+		+			Yes
4U SWARM4-40G-A4000 Pro				Yes	103
4U SWARM4-40G-A4000 Pro+				Yes	Yes
4U SWARM4-2C4K10G-A4000 Pro		Yes			
4U SWARM4-2C4K10G-A4000 Pro+		Yes			Yes
4U SWARM4-2C4K40G-A4000 Pro		Yes		Yes	
4U SWARM4-2C4K40G-A4000 Pro+		Yes		Yes	Yes
4U SWARM4-4CHD10G-A4000 Pro			Yes		
4U SWARM4-4CHD10G-A4000 Pro+			Yes		Yes
4U SWARM4-4CHD40G-A4000 Pro			Yes	Yes	
4U SWARM4-4CHD40G-A4000 Pro+			Yes	Yes	Yes
4U SWARM4-RE10G-A4000 Pro	Yes				
4U SWARM4-RE10G-A4000 Pro+	Yes				Yes
4U SWARM4-RE40G-A4000 Pro	Yes			Yes	
4U SWARM4-RE40G-A4000 Pro+	Yes			Yes	Yes
4U SWARM4-RE2C4K10G-A4000 Pro	Yes	Yes			
4U SWARM4-RE2C4K10G-A4000 Pro+	Yes	Yes			Yes
4U SWARM4-RE2C4K40G-A4000 Pro	Yes	Yes		Yes	
4U SWARM4-RE2C4K40G-A4000 Pro+	Yes	Yes		Yes	Yes
4U SWARM4-RE4CHD10G-A4000 Pro	Yes		Yes		
4U SWARM4-RE4CHD10G-A4000 Pro+	Yes		Yes		Yes
4U SWARM4-RE4CHD40G-A4000 Pro	Yes		Yes	Yes	
4U SWARM4-RE4CHD40G-A4000 Pro+	Yes		Yes	Yes	Yes




## **Graphics Card**

Chipset	RTX A4000
Microarchitecture	Ampere
Memory	16GB GDDR6
Memory Bandwidth	448 GB/s
Interface	PCIe 4.0 (x16)
Microsoft DirectX Support	12 API
HDCP Ready	Yes
Maximum Concurrent Displays	4 Displays
Maximum Digital Resolution	7680x4320 @ 60Hz (8K UHD)
Outputs	4 x DisplayPort 1.4
EDID Emulation	Yes
Sync Module Supported	Yes
Supported API's	DirectX 12.0, OpenGL 4.5, Shader Model 5.1, Vulkan 1.0


### **Connectors**

#### **Front Panel**

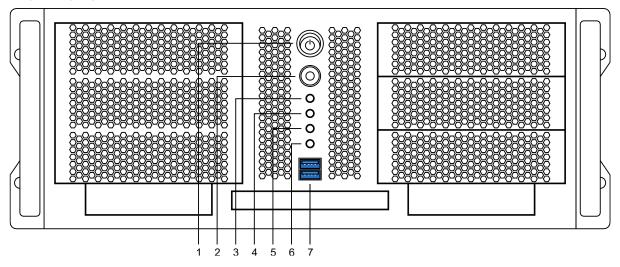


- Power Button
- 2. Reset Button
- 3. **Power LED**
- 4. HDD Activity LED
- 5. LAN1 Activity LED
- 6. LAN2 Activity LED
- 7. **USB 3.0 Ports**



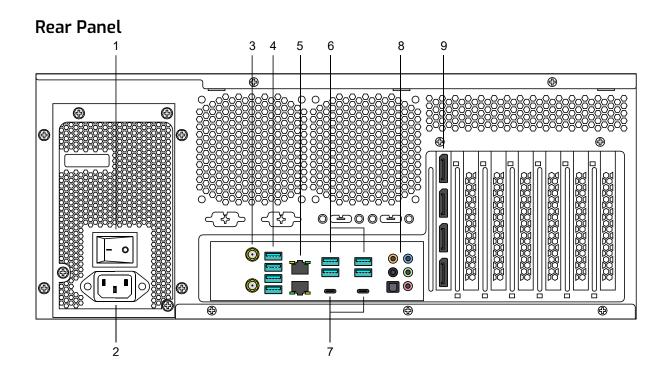


#### Variant with Sync Module, 2 x 4K Capture and 40G

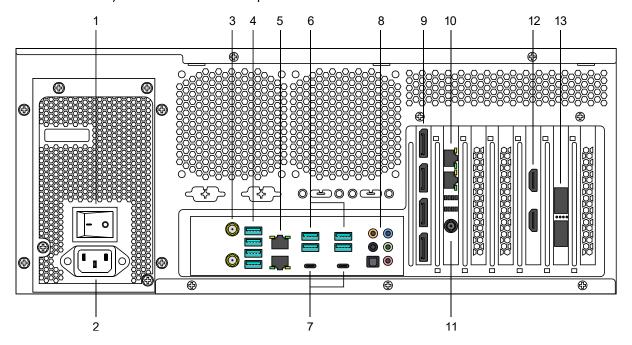



#### Variant with Sync Module, 4 x HD Capture and 40G

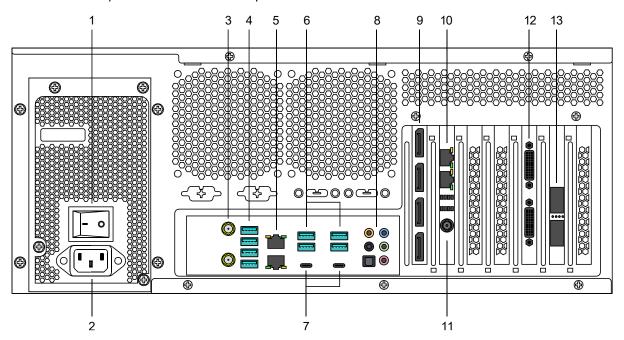

- Power Supply Power Switch
- 2. **Power IEC.** Mains Power Input: 100 240V<sup>~</sup>, 15 7.5A, 47 63Hz
- 3. WiFi 6 (802.11 a/b/g/n/ac/ax), Bluetooth v5.1
- 4. USB 3.2 Gen2 Type-A Ports
- 5. LAN RJ-45 Ports. 10 Gigabit Ethernet

#### LAN port LED Indications

Activity / Link LE	D	Speed LED		
Status	Description	Status	Description	ACT/LINK SPEED LED LED
OFF	No link	OFF	100Mbps connection	
GREEN	Linked	GREEN	10Gbps connection	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
BLINKING	Data activity	ORANGE	1Gbps connection	
				LAN port

- 6. USB 3.2 Gen2 Type-A Ports
- 7. USB 3.2 Gen2 Type-C Ports
- 8. **Audio Ports.** Includes Optical S/PDIF Output

Audio Ports Channel Configuration				
Port	Headset / 2 Channels	4 Channel	5.1 Channel	7.1 Channel
Light Blue	Line In	Line In	Line In	Side Speaker Out
Lime	Line Out	Front Speaker Out	Front Speaker Out	Front Speaker Out
Pink	Mic In	Mic In	Mic In	Mic In
Orange	-	-	Centre / Sub	Centre / Sub
			Woofer	Woofer
Black	-	Rear Speaker Out	Rear Speaker Out	Rear Speaker Out



- 9. **DisplayPort 1.4 ( x 4 )**
- 10. Sync Module Daisey Chain ( RJ45 x 2 ). ( Sync Module Variant )
- 11. **BNC Genlock Sync.** (Sync Module Variant)
- 12. **Capture Ports.** (2 x HDMI 2.0 4K Capture Variant, 2 x Custom Connector HD Capture Variant)
- 13. **SFP+ Network Ports.** 40 Gb Ethernet ( 40G Variant )

## **Internal Expansion**

- 3 x M.2 Socket with M key, type 2260/2280 storage devices support (PCIE x4 Gen4 mode)
- Up to 8 x NVMe Storage via RAID Controller Card (RAID 0, 1, and 10)
- $4 \times 3.5$ " Drive bays (SATA), Supports RAID 0, 1, 10 and 5




## **Chassis Specification**

The DVS 4U SWARM4-10G-A4000 Pro is a four-rack unit high chassis, designed to fit in standard 19" rack cabinets. Optional rack rails are available for the system.

Colour	Silver, Black Front
Dimension (D x W x H)	465.2 x 430.0 x 176.0 (mm), 18.32" x 16.93" x 6.93"
Drive Bay	Exposed:
	• 3 x 5.25"
	• 1x 3.5",
	1 x Slim ODD
	Internal:
	• 4 x 3.5"

### Ventilation

The 4U SWARM4-10G-A4000 Pro is a rack mountable server, all cool air intake is from the front of the chassis and all hot air is actively expelled from the rear of the chassis. The chassis is designed to be in a climate-controlled server room environment.

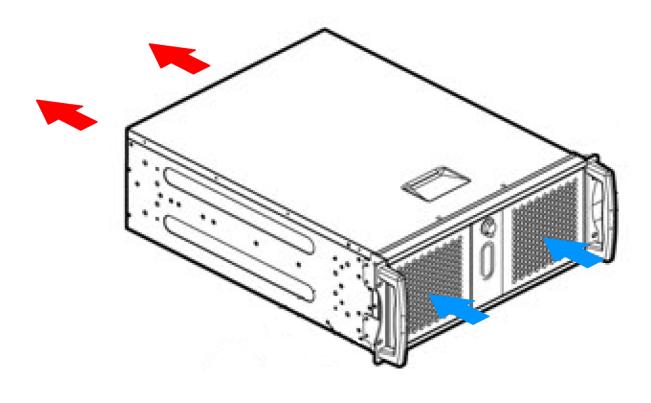



## **Supported Video Formats**

The system comes with Windows installed as standard. Windows includes Windows Media Player by default. As of Windows Media Player 12 the following video formats are supported:

- Windows Media formats (.asf, .wma, .wmv, .wm)
- Windows Media Metafiles (.asx, .wax, .wvx, .wmx)
- Windows Media Metafiles (.wpl)
- Microsoft Digital Video Recording (.dvrms)
- Windows Media Download Package (.wmd)
- Audio Visual Interleave (.avi)
- Moving Pictures Experts Group (.mpg, .mpeg, .m1v, .mp2, .mp3, .mpa, .mpe, .m3u)
- Musical Instrument Digital Interface (.mid, .midi, .rmi)
- Audio Interchange File Format (.aif, .aifc, .aiff)
- Sun Microsystems and NeXT (.au, .snd)
- Audio for Windows (.wav)
- CD Audio Track (.cda)
- Indeo Video Technology (.ivf)
- Windows Media Player Skins (.wmz, .wms)
- QuickTime Movie file (.mov)
- MP4 Audio file (.m4a)
- MP4 Video file (.mp4, .m4v, .mp4v, .3g2, .3gp2, .3gpp, .3gpp)
- Windows audio file (.aac, .adt, .adts)
- MPEG2 TS Video file (.m2ts)

<sup>\*</sup>Additional video formats can be supported by the installation of additional software.